

LH-450F Inverted flow wrapper

LH PACKAGING BV  
http://www.lhpackaging.nl



Packing sample

✶ Main performance & characteristics


- 1.Adopt a higher precision Servo system,with AC inverter intelligent and stepless controlling,which can realize simple operation and more correct cutting.
- 2.High-sensitive photo sensor, automatically adjust, track,find cutting point, accumulatively count packs,Automatic measure bag length.
- 3.Digital and independent PID temperature controlling,suitable for various packing materials.New type double fin sealing design makes the packaging highly efficient and beautiful.
- 4.Adjustable bag former and pitches,enables the change of packing products conveniently.
- 5.The area connect to products are full stainless steel.With timing belt transmission,Compact structure, lower noise and less shake.
- 6.Variety of optional device is available,Like:Touch screen/Date coder/Labels applicator/Euro slot or hole punch/Gusset forming /Nitrogen or gas inflation/Spraying alcohol/Automatic film splicer/ Auto feeding/Desiccant feeder /Auto falling/Products conveyor/No products no packing / Check weigher / Metal detector etc.

✶ Using range

Especially suitable for irregular and bulk products, sticky and soft objects,like sweetmeats,preserved fruit,sausages,squid, bread, instant noodles,soft cakes, jelly,fresh fruits,crisp egg rolls,towels, tissues,hotel commodity,hardware ,adhesive tape, pocket planner,drugs, etc.

✶ Technical parameter

Model	LH-450F
Packing speed (bag/minute)	30-120bag/min
Packing size (mm)	L100-400
Length × Width × Height	W80-200
	H0-45 / 45-75
Maximum width of film (mm)	<420mm
Thickness of film (mm)	≥0.02mm
Power	220V,50/60HZ,3.0KW
Overall size (mm)	4500*800*1520mm
Weight	580kg
Package	2.5CBM,2CASES
Packing material	OPP/PP、OPP/CPP、PT/PE、PE、KOP/CPP、PT/PE/、AL/PE etc. Any heat-sealable composite materials foil/film

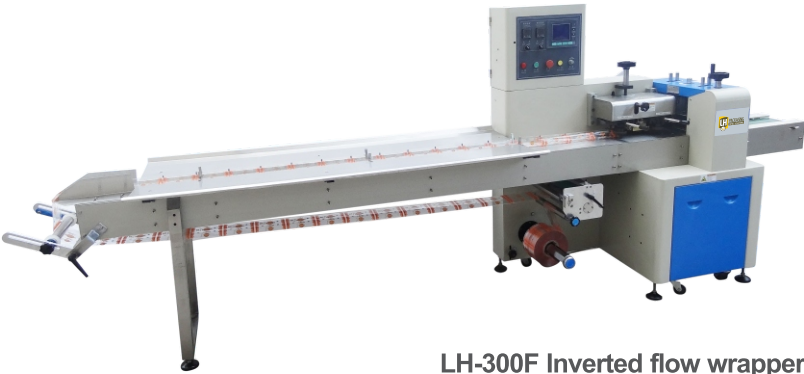

LH-300F Inverted flow wrapper



Horizontal flow wrapper

LH PACKAGING BV

Rijksweg 33a  
NL - 6584 AA Molenhoek (lb)  
The Netherlands


T +31 (0)24 - 3977590 F +31 (0)24 - 3972856  
H www.lhpackaging.nl E info@lhpackaging.nl

The actual technical data is changeable for different products and packing requirements. Please be subject to confirmation of both parties. The machine can be designed specially for the products beyond packing range.

LH-400<sup>E</sup> / LH-300F

Flow wrapper

LH PACKAGING BV  
http://www.lhpackaging.nl



Main performance & characteristics

- 1.Adopt a higher precision Servo system,with AC inverter intelligent and stepless controlling,which can realize simple operation and more correct cutting.
- 2.High-sensitive photo sensor, automatically adjust, track,find cutting point, accumulatively count packs,Automatic measure bag length.
- 3.Digital and independent PID temperature controlling,suitable for various packing materials.New type double fin sealing design makes the packaging highly efficient and beautiful.
- 4.Adjustable bag former and pitches,enables the change of packing products conveniently.
- 5.The machine covered with full stainless steel materials.With timing belt transmission,Compact structure, lower noise and less shake.
- 6.Variety of optional device is available,Like:Touch screen/Date coder/Labels applicator/Euro slot or hole punch/Gusset forming /Nitrogen or gas inflation/Spraying alcohol/Automatic film splicer/ Auto feeding/Desiccant feeder /Auto falling/Products conveyor/No products no packing / Check weigher / Metal detector etc.

Using range

Mainly used for various kinds of solid objects with regular shape(Square/Rectangle/Circular/Ellipse/Flake etc.),such as ice lolly,ice cream cone,cookies,bread,adhesive tape, pharmaceuticals tools,daily necessities, hardware, or any other products loaded in box or tray.

Technical parameter

Model	LH-400E
Packing speed (bag/minute)	30-200bag/min
Packing size (mm)	L80-350
Length × Width × Height	W10-60 / 60-120 H5-30 / 30-60
Maximum width of film (mm)	<400mm
Thickness of film (mm)	≥0.02mm
Power	220V,50/60HZ,2.8KW
Overall size (mm)	4400*940*1640mm
Weight	650kg
Package	2.6CBM,2CASES
Packing material	OPP/PP、OPP/CPP、PT/PE、PE、KOP/CPP、PT/PE/、AL/PE etc. Any heat-sealable composite materials foil/film



Packing sample

LH-350F

Flow wrapper

Main performance & characteristics

- 1.Adopt a higher precision Servo system,with AC inverter intelligent and stepless controlling,which can realize simple operation and more correct cutting.
- 2.High-sensitive photo sensor, automatically adjust, track,find cutting point, accumulatively count packs,Automatic measure bag length.
- 3.Digital and independent PID temperature controlling,suitable for various packing materials.New type double fin sealing design makes the packaging highly efficient and beautiful.
- 4.Adjustable bag former and pitches,enables the change of packing products conveniently.
- 5.The machine covered with full stainless steel materials.With timing belt transmission,Compact structure, lower noise and less shake.
- 6.Variety of optional device is available,Like:Touch screen/Date coder/Labels applicator/Euro slot or hole punch/Gusset forming /Nitrogen or gas inflation/Spraying alcohol/Automatic film splicer/ Auto feeding/Desiccant feeder /Auto falling/Products conveyor/No products no packing / Check weigher / Metal detector etc.

Using range

Mainly used for various kinds of solid objects with regular shape(Square/Rectangle/Circular/Ellipse/Flake etc.),such as ice lolly,ice cream cone,cookies,bread,adhesive tape, pharmaceuticals tools,daily necessities, hardware, or any other products loaded in box or tray.

Technical parameter

Model	LH-350F
Packing speed (bag/minute)	30-200bag/min
Packing size (mm)	L80-350
Length × Width × Height	W10-60 / 60-120 H5-40 / 40-70
Maximum width of film (mm)	<360mm
Thickness of film (mm)	≥0.02mm
Power	220V,50/60HZ,3.0KW
Overall size (mm)	4600*880*1550mm
Weight	700kg
Package	2.6CBM,2CASES
Packing material	OPP/PP、OPP/CPP、PT/PE、PE、KOP/CPP、PT/PE/、AL/PE etc. Any heat-sealable composite materials foil/film



Packing sample