



Horizontal flow wrapper chain type

Main performance & characteristics


- 1.Adopt a higher precision Servo system,with AC inverter intelligent and stepless controlling,which can realize simple operation and more correct cutting.
- 2.High-sensitive photo sensor, automatically adjust, track,find cutting point, accumulatively count packs,Automatic measure bag length.
- 3.Digital and independent PID temperature controlling,suitable for various packing materials.New type double fin sealing design makes the packaging high efficient and beautiful.
- 4.Adjustable bag former and pitches,enables the change of packing products conveniently.
- 5.The machine covered with full stainless steel materials.With timing belt transmission,Compact structure, lower noise and less shake.
- 6.Variety of optional device is available,Like:Touch screen/Date coder/Labels applicator/Euro slot or hole punch/Gusset forming /Nitrogen or gas inflation/Spraying alcohol/Automatic film splicer/ Auto feeding/Desiccant feeder /Auto falling/Products conveyor/No products no packing / Check weigher / Metal detector etc.

Applicable

Usage: Suitable for automatic packing of bearings,tapes and hardware regular products etc.

Technical parameter

|                            |                       |
|----------------------------|-----------------------|
| Packing speed (bag/minute) | 30–200                |
| Packing size (mm)          | L60–280 W30–120 H5–50 |
| Maximum width of film (mm) | 350                   |
| Motor power                | 2.25kw                |
| Heats up power             | 1.6kw                 |
| Rated voltage              | 220V/50Hz             |
| Rated frequency            | 3.85kw                |
| Weight of the machine      | 900KG                 |
| Overall size (mm)          | 4400x1500x1520        |

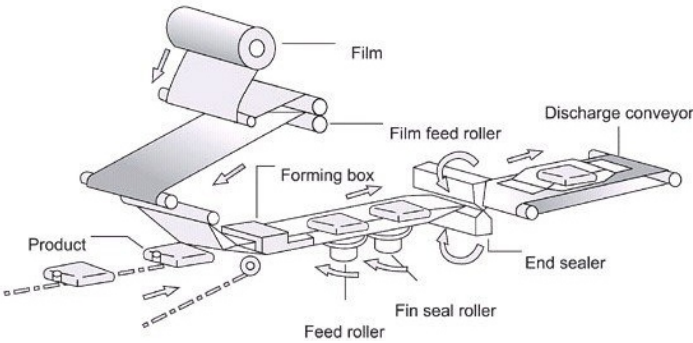

All packing sizes of the machine can be made according to customer's requirements


LH PACKAGING BV

Rijksweg 33a  
NL - 6584 AA Molenhoek (lb)  
The Netherlands

T +31 (0)24 - 3977590 F +31 (0)24 - 3972856  
H [www.lhpackaging.nl](http://www.lhpackaging.nl) E [info@lhpackaging.nl](mailto:info@lhpackaging.nl)

LH-450E Flow wrapper with labeling applicator

LH PACKAGING BV  
http://www.lhpackaging.nl

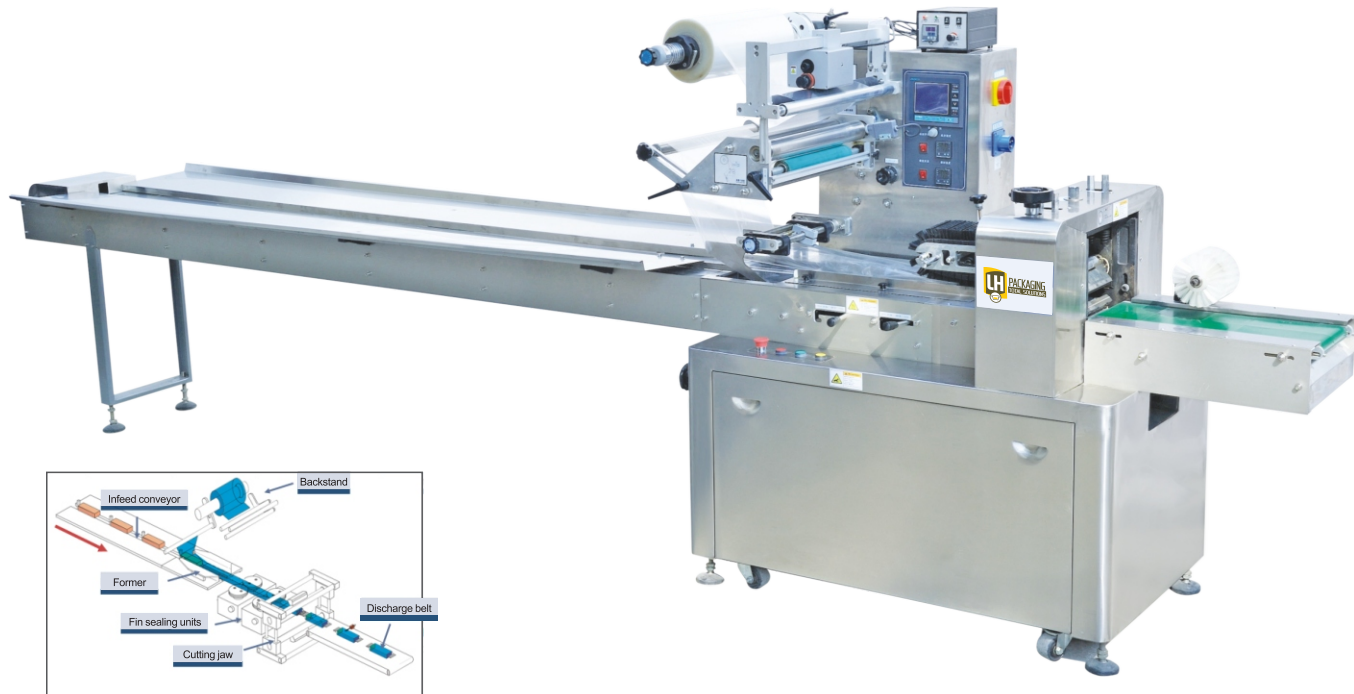

Main performance & characteristics

- 1.Adopt a higher precision Servo system,with AC inverter intelligent and stepless controlling,which can realize simple operation and more correct cutting.
- 2.High-sensitive photo sensor, automatically adjust, track,find cutting point, accumulatively count packs,Automatic measure bag length.
- 3.Digital and independent PID temperature controlling,suitable for various packing materials.New type double fin sealing design makes the packaging high efficient and beautiful.
- 4.Adjustable bag former and pitches,enables the change of packing products conveniently.
- 5.The machine covered with full stainless steel materials.With timing belt transmission,Compact structure, lower noise and less shake.
- 6.Variety of optional device is available,Like:Touch screen/Date coder/Labels applicator/Euro slot or hole punch/Gusset forming /Nitrogen or gas inflation/Spraying alcohol/Automatic film splicer/ Auto feeding/Desiccant feeder /Auto falling/Products conveyor/No products no packing / Check weigher / Metal detector etc.

Using range

Mainly used for various kinds of solid objects with big sizes: such as: cookies,bread,pizza and cake bases, instant noodles, toilet paper,sanitary towel,baby diaper,fabric,infusion bag, pipe and fittings,lamps and lanterns,industrial parts,pharmaceuticals tools,daily necessities, hardware, or any other big sizes products loaded in box or tray.

Technical parameter

|                            |   |
|----------------------------|---|
| Model                      | LH-450E   |
| Packing speed (bag/minute) | 30-180bag/min   |
| Packing size (mm)          | L100-400  |
| Length × Width × Height    | W30-100 / 100-200   |
|                            | H10-45 / 45-75  |
| Maximum width of film (mm) | <500mm  |
| Thickness of film (mm)     | ≥ 0.02mm  |
| Power                      | 220V,50/60HZ,3.2KW  |
| Overall size (mm)          | 4420*950*1620mm   |
| Weight                     | 750kg   |
| Package                    | 3.1CBM,2CASES   |
| Packing material           | OPP/PP、OPP/CPP、PT/PE、PE、KOP/CPP、PT/PE/、AL/PE etc. Any heat-sealable composite materials foil/film |



Packing sample

Main performance & characteristics

- 1.Adopt a higher precision Servo system,with AC inverter intelligent and stepless controlling,which can realize simple operation and more correct cutting.
- 2.High-sensitive photo sensor, automatically adjust, track,find cutting point, accumulatively count packs,Automatic measure bag length.
- 3.Digital and independent PID temperature controlling,suitable for various packing materials.New type double fin sealing design makes the packaging high efficient and beautiful.
- 4.Adjustable bag former and pitches,enables the change of packing products conveniently.
- 5.The machine covered with full stainless steel materials.With timing belt transmission,Compact structure, lower noise and less shake.
- 6.Variety of optional device is available,Like:Touch screen/Date coder/Labels applicator/Euro slot or hole punch/Gusset forming /Nitrogen or gas inflation/Spraying alcohol/Automatic film splicer/ Auto feeding/Desiccant feeder /Auto falling/Products conveyor/No products no packing / Check weigher / Metal detector etc.

Using range

Mainly used for various kinds of solid objects with regular shape(Square/Rectangle/Circular/Ellipse/Flake etc.),such as moon-cake, muffin cake,bread, fruit pie,biscuits,swiss roll,sweets, chocolate, pharmaceuticals tools,medicine,daily necessities, hardware, or any other products loaded in box or tray.

Technical parameter

|                            |   |
|----------------------------|---|
| Model                      | LH-450F   |
| Packing speed (bag/minute) | 30-180bag/min   |
| Packing size (mm)          | L100-400  |
| Length × Width × Height    | W30-100 / 100-200   |
|                            | H10-45 / 45-75  |
| Maximum width of film (mm) | <500mm  |
| Thickness of film (mm)     | ≥ 0.02mm  |
| Power                      | 220V,50/60HZ,3.2KW  |
| Overall size (mm)          | 4650*950*1620mm   |
| Weight                     | 750kg   |
| Package                    | 3.1CBM,2CASES   |
| Packing material           | OPP/PP、OPP/CPP、PT/PE、PE、KOP/CPP、PT/PE/、AL/PE etc. Any heat-sealable composite materials foil/film |



Packing sample

The actual technical data is changeable for different products and packing requirements. Please be subject to confirmation of both parties. The machine can be designed specially for the products beyond packing range.

The actual technical data is changeable for different products and packing requirements. Please be subject to confirmation of both parties. The machine can be designed specially for the products beyond packing range.