







HIGH SPEED WEIGHER

LH PACKAGING BV
http://www.lhpackaging.nl

HIGH SPEED WEIGHER



High Speed Weigher

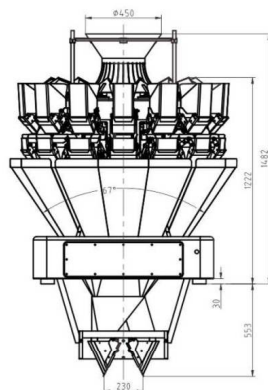

Application

It is suitable for easy-flow granules.

Features

1. Arc-shaped machine frame.
2. Integral machine frame with stable and strong center tower and base to improve performance.
3. New springless actuator design makes weighing more stable and quickly.
4. High speed hoppers without springs to avoid the broken spring falling into packages.

Mechanical Character

1. The third generation modular control system.
2. Malfunction self-checking function.
3. Double-layer discharging chute with double high speed timing hoppers feed packaging machine in turn, surmount the speed problems of discharging chute feed time.

Technical Specification

| | LH-14HS-III | LH-18HS-III |
|-----------------------|--|-------------------------|
| Model | LH-14HS-III | LH-18HS-III |
| Single Weighing Range | 10-800g | 10-800g |
| Accuracy | X(0.5) | X(0.5) |
| Max Speed | 130P/M | 180P/M |
| Hopper Volume | 2.1L | |
| Control Panel | 9.7" Touch Screen | |
| Options | Dimple Plate/Timing Hopper/Printer/Reject Device | |
| Driving System | Step Motor | |
| Power Requirement | 220V/1000W/50/60HZ/10A | 220V/1000W/50/60HZ/10A |
| Packing Dimension(mm) | 1700(L)x1200(W)x1300(H) | 1950(L)x1650(W)x1650(H) |
| Gross Weight | 500kg | 800kg |